



HMMWV...

# Cooling System Care

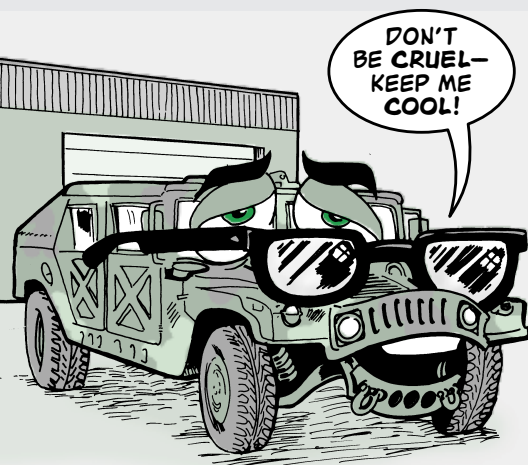

**K**eeping a HMMWV cool in the heat of summer requires a clean oil cooler and a clean, straight-finned radiator.


To get the trash out from between the cooler and the radiator is a real job. There's not much room between the cooler and the radiator, so go with this:

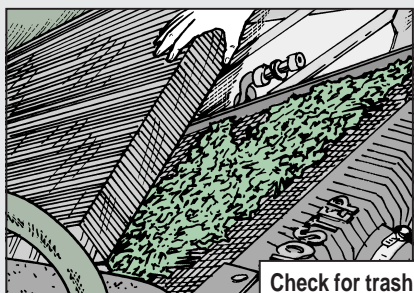

First, move the power steering cooler out of the way.


Then remove the four sockethead screws and washers that hold the oil cooler to the radiator.

Then raise the oil cooler carefully and place a 2 1/2-in block of 2 x 4 under each corner of the cooler.

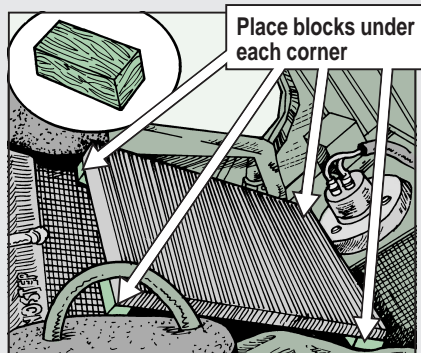

Clean between the cooler and radiator using only low-pressure water and low-pressure air.

Eyeball the radiator fins when the cleaning is done. Straighten all the bent fins you can reach with the fin straightening tool, NSN 5120-00-157-2180, from either of the Common shop sets. If your set doesn't have this tool, local purchase it.

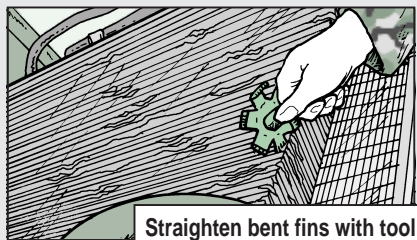

After you've finished, remove the wood blocks and secure the cooler in place. Straighten any bent fins on the cooler. Then put the power steering cooler back in place.